



TEST REPORT

Report no.:

300-KLAB-16-021 Sound power

Product:

Type: Air to water heat pump
Panasonic WH-SQC12H9E8/WH-UQ12HE8

Customer:

Panasonic DE GmbH

Date:

May 2017

Consultants:

Kamalathasan Arumugam & Birger Bech Jessen



DANISH
TECHNOLOGICAL
INSTITUTE

TEST REPORT

DK-8000 Aarhus C
Tel.: 72 20 20 00
Fax: 72 20 10 19

Date: 2017.05.24
Report no.: 300-KLAB-16-021
File no.: 702560

Page: 1 of 12
Init.: KAMA/JGW
Enclosures: 1

info@teknologisk.dk
www.teknologisk.dk

Customer: Contact person: Thomas Gross
Company: Panasonic DE GmbH
Address: Hagenauer Strasse 43
City: 65203 Wiesbaden
Tel.: +49 1724 141441

Component: Brand: Panasonic
Type: Air to water heat pump
Model: Indoor WH-SQC12H9E8 & outdoor WH-UQ12HE8
Series no.: 55174 & 56185
Production year: Indoor n.a., outdoor n.a.

Dates Component tested: May 2017

Procedure: Test procedure according to EN 12102:2013 and the method ISO 3743-1:2010 and EN 14511:2013 part 1, 2, 3, and 4.

Remarks: The unit was delivered by the customer as model WH-SQC09H3E8 & outdoor UQ09HE8, cf. the rating plates of the units. By changing the software, the unit was changed to model WH-SQC12H9E8 & WH-UQ12HE8. Installation and setting of the unit's control system were done according to the manufacturer's instructions.

Conditions: Accredited testing was carried out in compliance with the current guidelines laid down by DANAK (Danish Laboratory Accreditation Scheme), please see www.danak.dk, and in compliance with Danish Technological Institute's General Terms and Conditions regarding Commissioned Work Accepted by Danish Technological Institute, March 2015.

The test results apply to the tested products only.

This test report may be reproduced in extract only if the Laboratory has approved the extract in writing.

Division/Centre: Danish Technological Institute
Energy and Climate
Heat Pump Laboratory, Aarhus

Date: 2017.05.24

Signature:

Co-reader:

Kamalathasan Arumugam
B.Sc. Engineer

Birger Bech Jessen
Senior Consultant



DANISH
TECHNOLOGICAL
INSTITUTE

Page 3 of 13
300-KLAB-16-022

Objective

The objective of this report is to document the sound power level of the outdoor unit at the test conditions and heat pump settings stated in the table below.

The measurement of the sound power level is performed according to the standard EN 12102, using the Class A method. ISO 3743-1 is the basic method of carrying out sound power measurements. The method is briefly described in appendix 1. For a more detailed description, please view the accreditation papers DANAK-300 (in Danish only). The sound power level is measured for the outdoor unit only and not for the indoor unit as neither the compressor nor the fan is a part of this.



DANISH
TECHNOLOGICAL
INSTITUTE

Page 4 of 13
300-KLAB-16-022

Test conditions and heat pump settings for sound power measurements

N °	Test condition	Heat pump setting				
		Compressor speed [Hz]	Fan speed 1 [rpm]	Fan speed 2 [rpm]	Heating capacity [kW]	Water flow rate [l/h]
1 ¹	A7/W35	47-48	520	560	12.0	2060
2 ²	A7/W35	33-34	370	410	8.4	1470
3 ³	A7/W35	20	360	400	5.0	860
4 ¹	A7/W55	52-53	530	570	11.7	1250
5 ²	A7/W55	36-37	380	420	7.9	850
6 ³	A7/W55	20	360	400	2.05	700

¹) Free mode, ²) Quiet mode level 3, ³) Test mode 4



Test results of the sound power test

Test results of the sound power measurements N°	Sound power level LW(A) [dB re 1pW]	Uncertainty [dB] (weighted value)
1	59	0.1
2	52	0.2
3	50	0.1
4	61	0.2
5	54	0.4
6	52	0.1

The uncertainty value is a weighted value using the level and frequency dependant influence for each 1/1-octave level on the final A-weighted sound power level.

The A-weighted total sound power level is determined for the measured frequency range from 100 Hz to 10 kHz.



DANISH
TECHNOLOGICAL
INSTITUTE

Page 6 of 13
300-KLAB-16-022


Outdoor unit



Rating plate - outdoor unit

Panasonic			
AIR-TO-WATER HEATPUMP			
OUTDOOR UNIT			
Model No.	WH-UQ09HE8		
RATED VOLTAGE	400V		
PHASE	3N~		
FREQUENCY	50Hz		
MAXIMUM INPUT	6.85kW/10.4A		
REFRIGERANT	R410A	2.85kg	
CAPACITY	COOLING	HEATING	HEATING
	(A35W7)	(A7W35)	(A2W35)
	7.00kW	9.00kW	9.00kW
CURRENT	3.4A	2.8A	3.8A
POWER INPUT	2.21kW	1.96kW	2.51kW
EER/COP	3.17	4.84	3.59
(EN 14511)			
MWP	H.P. 4.15MPa	L.P. 2.00MPa	
SERIAL NO.			
56185			
PRODUCTION DATE			
Panasonic Appliances			
Air-Conditioning Malaysia Sdn. Bhd.			
Shah Alam Malaysia			
Authorized representative in EU			
Panasonic Testing Centre			
Panasonic Marketing Europe GmbH			
Winsbergring 15, 22525 Hamburg, Germany			
THIS PRODUCT CONTAINS FLUORINATED GREENHOUSE GASES			
			
			
			
IP24			
Made in Malaysia			
R410A			
ACXF02-08811			

Indoor unit

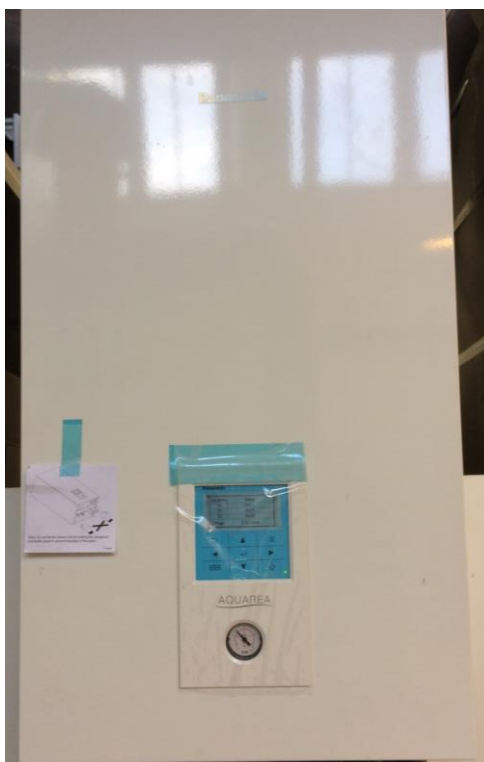

Rating plate - indoor unit




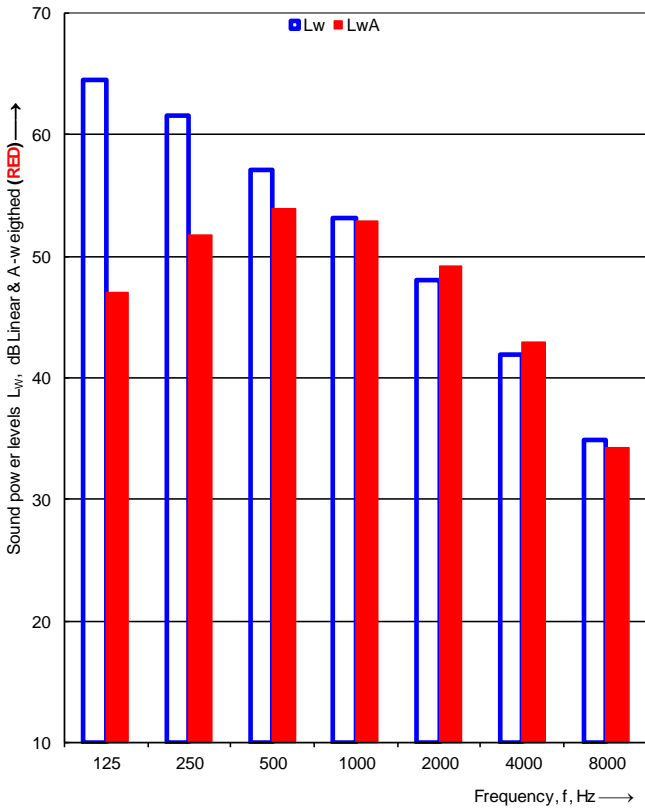
Panasonic	
AIR-TO-WATER HEATPUMP	
Model No.	WH-SQC09H3E8
OUTDOOR UNIT	WH-UQ09HE8
POWER SUPPLY 1	
RATED VOLTAGE	400V
PHASE	3N~
RATED FREQUENCY	50Hz
MAXIMUM INPUT	9.85kW/14.7A
(HEATPUMP UNIT + BACKUP HEATER)	
BACKUP HEATER	
RATED POWER	3.00kW
RATED CURRENT	4.3A
POWER SUPPLY 2 (BOOSTER HEATER)	
RATED VOLTAGE	230V~
RATED FREQUENCY	50Hz
MAXIMUM POWER	3.00kW
MAXIMUM CURRENT	13.0A
MWP (WATER)	0.3MPa
HEATING WATER FLOW	1.5m³/h
COOLING WATER FLOW	1.2m³/h
SERIAL NO.	55174
PRODUCTION DATE	
Panasonic Appliances	
Air-Conditioning Malaysia Sdn. Bhd.	
Shah Alam Malaysia	
Made in Malaysia	
Authorized representative in EU	
Panasonic Testing Centre	
Panasonic Marketing Europe GmbH	
Winsbergring 15, 22525 Hamburg, Germany	
R410A	
CE	
ACXF09-01370	



DANISH
TECHNOLOGICAL
INSTITUTE

Page 7 of 13
300-KLAB-16-022

Detailed test results - sound power level - test 1




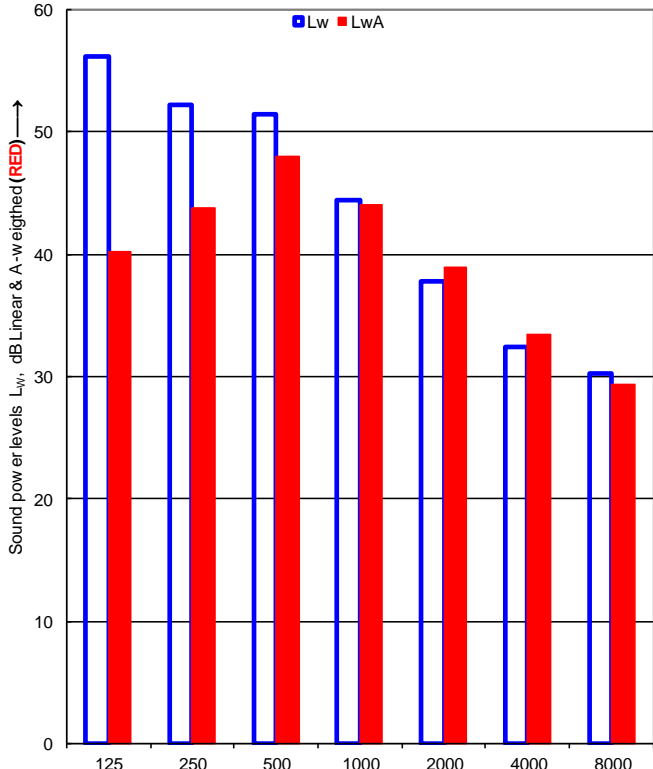
 		Sound power levels according to ISO 3743-1:2010	 TEKNOLOGISK INSTITUT																																																																		
Engineering method for small, movable sources in reverberant fields - Comparison method for hard-walled test rooms																																																																					
Client:	Panasonic Marketing Europe GmbH		Date of test: 10-05-2017																																																																		
Object:	Split air to water heatpump Model: WH-UQ12HE8(Outdoor unit) + WH-SQC12H9E8(Indoor unit)																																																																				
Mounting conditions:	The outdoor unit is standing free on four 5.5 cm thick heavy concrete tiles placed on a vibration damping mat, which is placed on a water drop tray. The water drop tray is located on a 2.5 cm thick wooden board laying on the floor. The outdoor unit is mounted on 6 supporting metal support frame using 6 vibration insulators.																																																																				
Operating conditions: A7/W35, Compressor speed: 47-48[Hz], Heating capacity: 12.0[kW], COP: 4.6, Water flow rate: 2060[l/h], Fan speed 1:520[rpm], Fan speed 2: 560[rpm]																																																																					
Static pressure:	1013 kPa	<u>Reference box:</u>																																																																			
Air temperature:	7.0 °C	L1: 1.3 m																																																																			
Relative air humidity:	84.0 %	L2: 0.3 m																																																																			
Test room volume:	102.8 m³	L3: 1.3 m																																																																			
Area, S, of test room:	138.9 m²	Volume: 0.5 m³																																																																			
<table border="1"><thead><tr><th>Frequency f [Hz]</th><th>L_w 1/3 octave [dB]</th><th>1/1 oct [dB]</th></tr></thead><tbody><tr><td>100</td><td>63.0</td><td></td></tr><tr><td>125</td><td>57.2</td><td>64.5</td></tr><tr><td>160</td><td>54.5</td><td></td></tr><tr><td>200</td><td>60.2</td><td></td></tr><tr><td>250</td><td>53.2</td><td>61.5</td></tr><tr><td>315</td><td>52.1</td><td></td></tr><tr><td>400</td><td>51.8</td><td></td></tr><tr><td>500</td><td>53.4</td><td>57.1</td></tr><tr><td>630</td><td>51.4</td><td></td></tr><tr><td>800</td><td>50.4</td><td></td></tr><tr><td>1000</td><td>47.3</td><td>53.2</td></tr><tr><td>1250</td><td>46.4</td><td></td></tr><tr><td>1600</td><td>44.8</td><td></td></tr><tr><td>2000</td><td>43.1</td><td>48.0</td></tr><tr><td>2500</td><td>41.0</td><td></td></tr><tr><td>3150</td><td>39.1</td><td></td></tr><tr><td>4000</td><td>36.8</td><td>41.9</td></tr><tr><td>5000</td><td>34.1</td><td></td></tr><tr><td>6300</td><td>32.2</td><td></td></tr><tr><td>8000</td><td>30.2</td><td>34.9</td></tr><tr><td>10000</td><td>26.0</td><td></td></tr></tbody></table>		Frequency f [Hz]	L _w 1/3 octave [dB]	1/1 oct [dB]	100	63.0		125	57.2	64.5	160	54.5		200	60.2		250	53.2	61.5	315	52.1		400	51.8		500	53.4	57.1	630	51.4		800	50.4		1000	47.3	53.2	1250	46.4		1600	44.8		2000	43.1	48.0	2500	41.0		3150	39.1		4000	36.8	41.9	5000	34.1		6300	32.2		8000	30.2	34.9	10000	26.0			
Frequency f [Hz]	L _w 1/3 octave [dB]	1/1 oct [dB]																																																																			
100	63.0																																																																				
125	57.2	64.5																																																																			
160	54.5																																																																				
200	60.2																																																																				
250	53.2	61.5																																																																			
315	52.1																																																																				
400	51.8																																																																				
500	53.4	57.1																																																																			
630	51.4																																																																				
800	50.4																																																																				
1000	47.3	53.2																																																																			
1250	46.4																																																																				
1600	44.8																																																																				
2000	43.1	48.0																																																																			
2500	41.0																																																																				
3150	39.1																																																																				
4000	36.8	41.9																																																																			
5000	34.1																																																																				
6300	32.2																																																																				
8000	30.2	34.9																																																																			
10000	26.0																																																																				
Sound power level L _w (A):		59 dB [re 1pW]																																																																			
Name of test institute:	DTI																																																																				
No. of test report:	300-KLAB-16-021																																																																				
Date:	10-05-2017																																																																				



DANISH
TECHNOLOGICAL
INSTITUTE

Page 8 of 13
300-KLAB-16-022

Detailed test results - sound power level - test 2




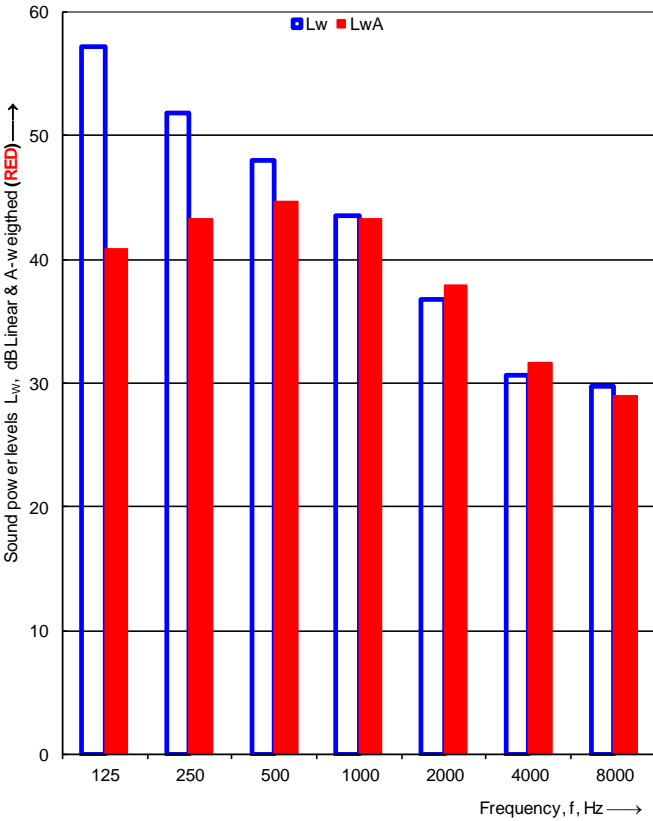
 		Sound power levels according to ISO 3743-1:2010	 TEKNOLOGISK INSTITUT																																																																		
Engineering method for small, movable sources in reverberant fields - Comparison method for hard-walled test rooms																																																																					
Client:	Panasonic Marketing Europe GmbH		Date of test: 10-05-2017																																																																		
Object:	Split air to water heatpump Model: WH-UQ12HE8(Outdoor unit) + WH-SQC12H9E8(Indoor unit)																																																																				
Mounting conditions:	The outdoor unit is standing free on four 5.5 cm thick heavy concrete tiles placed on a vibration damping mat, which is placed on a water drop tray. The water drop tray is located on a 2.5 cm thick wooden board laying on the floor. The outdoor unit is mounted on 6 supporting metal support frame using 6 vibration insulators.																																																																				
Operating conditions:	A7/W35, Compressor speed: 33-34[Hz], Heating capacity: 8.4[kW], COP: 4.8, Water flow rate: 1470[l/h], Fan speed 1:370[rpm], Fan speed 2: 410[rpm], Quiet mode 3																																																																				
Static pressure:	1013 kPa	<u>Reference box:</u>																																																																			
Air temperature:	7.0 °C	L1: 1.3 m																																																																			
Relative air humidity:	84.0 %	L2: 0.3 m																																																																			
Test room volume:	102.8 m³	L3: 1.3 m																																																																			
Area, S, of test room:	138.9 m²	Volume: 0.5 m³																																																																			
<table border="1"><thead><tr><th>Frequency f [Hz]</th><th>L_w 1/3 octave [dB]</th><th>1/1 oct [dB]</th></tr></thead><tbody><tr><td>100</td><td>52.0</td><td></td></tr><tr><td>125</td><td>51.5</td><td>56.1</td></tr><tr><td>160</td><td>50.5</td><td></td></tr><tr><td>200</td><td>47.0</td><td></td></tr><tr><td>250</td><td>48.4</td><td>52.2</td></tr><tr><td>315</td><td>46.6</td><td></td></tr><tr><td>400</td><td>48.0</td><td></td></tr><tr><td>500</td><td>46.5</td><td>51.5</td></tr><tr><td>630</td><td>45.1</td><td></td></tr><tr><td>800</td><td>41.9</td><td></td></tr><tr><td>1000</td><td>38.1</td><td>44.3</td></tr><tr><td>1250</td><td>37.2</td><td></td></tr><tr><td>1600</td><td>35.0</td><td></td></tr><tr><td>2000</td><td>32.7</td><td>37.8</td></tr><tr><td>2500</td><td>30.1</td><td></td></tr><tr><td>3150</td><td>28.9</td><td></td></tr><tr><td>4000</td><td>27.1</td><td>32.4</td></tr><tr><td>5000</td><td>26.5</td><td></td></tr><tr><td>6300</td><td>26.0</td><td></td></tr><tr><td>8000</td><td>26.6</td><td>30.3</td></tr><tr><td>10000</td><td>23.3</td><td></td></tr></tbody></table>		Frequency f [Hz]	L _w 1/3 octave [dB]	1/1 oct [dB]	100	52.0		125	51.5	56.1	160	50.5		200	47.0		250	48.4	52.2	315	46.6		400	48.0		500	46.5	51.5	630	45.1		800	41.9		1000	38.1	44.3	1250	37.2		1600	35.0		2000	32.7	37.8	2500	30.1		3150	28.9		4000	27.1	32.4	5000	26.5		6300	26.0		8000	26.6	30.3	10000	23.3			
Frequency f [Hz]	L _w 1/3 octave [dB]	1/1 oct [dB]																																																																			
100	52.0																																																																				
125	51.5	56.1																																																																			
160	50.5																																																																				
200	47.0																																																																				
250	48.4	52.2																																																																			
315	46.6																																																																				
400	48.0																																																																				
500	46.5	51.5																																																																			
630	45.1																																																																				
800	41.9																																																																				
1000	38.1	44.3																																																																			
1250	37.2																																																																				
1600	35.0																																																																				
2000	32.7	37.8																																																																			
2500	30.1																																																																				
3150	28.9																																																																				
4000	27.1	32.4																																																																			
5000	26.5																																																																				
6300	26.0																																																																				
8000	26.6	30.3																																																																			
10000	23.3																																																																				
Sound power level L _w (A):		52 dB [re 1pW]																																																																			
Name of test institute:	DTI																																																																				
No. of test report:	300-KLAB-16-021																																																																				
Date: 10-05-2017																																																																					



DANISH
TECHNOLOGICAL
INSTITUTE

Page 9 of 13
300-KLAB-16-022

Detailed test results - sound power level - test 3




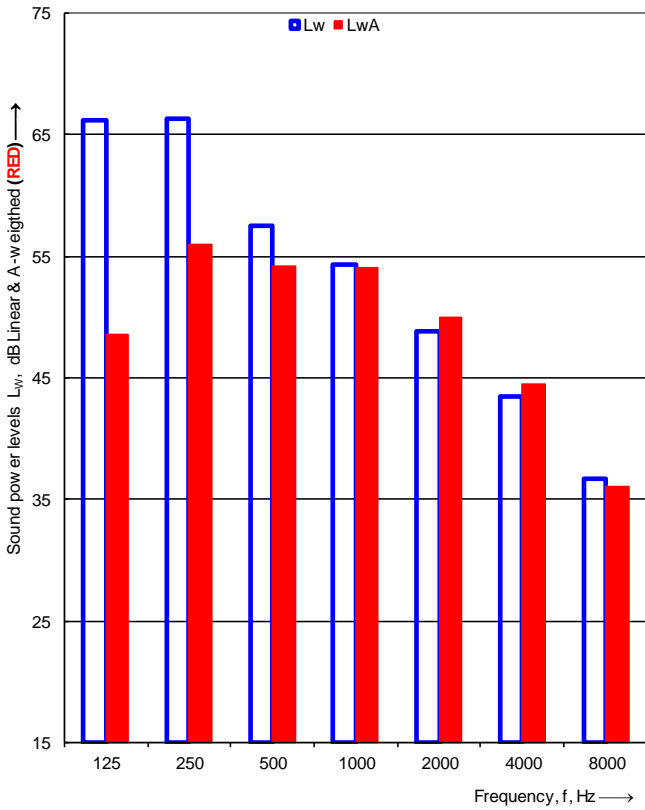
 		Sound power levels according to ISO 3743-1:2010		 TEKNOLOGISK INSTITUT																																																																			
Engineering method for small, movable sources in reverberant fields - Comparison method for hard-walled test rooms																																																																							
Client:		Panasonic Marketing Europe GmbH		Date of test: 11-05-2017																																																																			
Object:		Split air to water heatpump Model: WH-UQ12HE8(Outdoor unit) + WH-SQC12H9E8(Indoor unit)																																																																					
Mounting conditions:		The outdoor unit is standing free on four 5.5 cm thick heavy concrete tiles placed on a vibration damping mat, which is placed on a water drop tray. The water drop tray is located on a 2.5 cm thick wooden board laying on the floor. The outdoor unit is mounted on 6 supporting metal support frame using 6 vibration insulators.																																																																					
Operating conditions:		A7/W35, Compressor speed: 20[Hz], Heating capacity: 5.0[kW], COP: 4.9, Water flow rate: 860[l/h], Fan speed 1:360[rpm], Fan speed 2: 400[rpm], Test mode 4																																																																					
Static pressure:		1013 kPa		<u>Reference box:</u>																																																																			
Air temperature:		7.0 °C		L1: 1.3 m																																																																			
Relative air humidity:		84.0 %		L2: 0.3 m																																																																			
Test room volume:		102.8 m³		L3: 1.3 m																																																																			
Area, S, of test room:		138.9 m²		Volume: 0.5 m³																																																																			
<table border="1"><thead><tr><th>Frequency f [Hz]</th><th>L_w 1/3 octave [dB]</th><th>1/1 oct [dB]</th></tr></thead><tbody><tr><td>100</td><td>53.6</td><td></td></tr><tr><td>125</td><td>52.3</td><td>57.1</td></tr><tr><td>160</td><td>50.6</td><td></td></tr><tr><td>200</td><td>48.1</td><td></td></tr><tr><td>250</td><td>46.1</td><td>51.8</td></tr><tr><td>315</td><td>46.7</td><td></td></tr><tr><td>400</td><td>44.0</td><td></td></tr><tr><td>500</td><td>43.3</td><td>48.0</td></tr><tr><td>630</td><td>42.3</td><td></td></tr><tr><td>800</td><td>41.0</td><td></td></tr><tr><td>1000</td><td>37.6</td><td>43.5</td></tr><tr><td>1250</td><td>36.2</td><td></td></tr><tr><td>1600</td><td>34.1</td><td></td></tr><tr><td>2000</td><td>31.5</td><td>36.8</td></tr><tr><td>2500</td><td>28.8</td><td></td></tr><tr><td>3150</td><td>27.0</td><td></td></tr><tr><td>4000</td><td>24.6</td><td>30.6</td></tr><tr><td>5000</td><td>25.7</td><td></td></tr><tr><td>6300</td><td>26.5</td><td></td></tr><tr><td>8000</td><td>25.5</td><td>29.7</td></tr><tr><td>10000</td><td>21.3</td><td></td></tr></tbody></table>		Frequency f [Hz]	L _w 1/3 octave [dB]	1/1 oct [dB]	100	53.6		125	52.3	57.1	160	50.6		200	48.1		250	46.1	51.8	315	46.7		400	44.0		500	43.3	48.0	630	42.3		800	41.0		1000	37.6	43.5	1250	36.2		1600	34.1		2000	31.5	36.8	2500	28.8		3150	27.0		4000	24.6	30.6	5000	25.7		6300	26.5		8000	25.5	29.7	10000	21.3					
Frequency f [Hz]	L _w 1/3 octave [dB]	1/1 oct [dB]																																																																					
100	53.6																																																																						
125	52.3	57.1																																																																					
160	50.6																																																																						
200	48.1																																																																						
250	46.1	51.8																																																																					
315	46.7																																																																						
400	44.0																																																																						
500	43.3	48.0																																																																					
630	42.3																																																																						
800	41.0																																																																						
1000	37.6	43.5																																																																					
1250	36.2																																																																						
1600	34.1																																																																						
2000	31.5	36.8																																																																					
2500	28.8																																																																						
3150	27.0																																																																						
4000	24.6	30.6																																																																					
5000	25.7																																																																						
6300	26.5																																																																						
8000	25.5	29.7																																																																					
10000	21.3																																																																						
		Sound power level L _w (A): 50 dB [re 1pW]																																																																					
Name of test institute:		DTI																																																																					
No. of test report:		300-KLAB-16-021																																																																					
Date:		11-05-2017																																																																					



DANISH
TECHNOLOGICAL
INSTITUTE

Page 10 of 13
300-KLAB-16-022

Detailed test results - sound power level - test 4




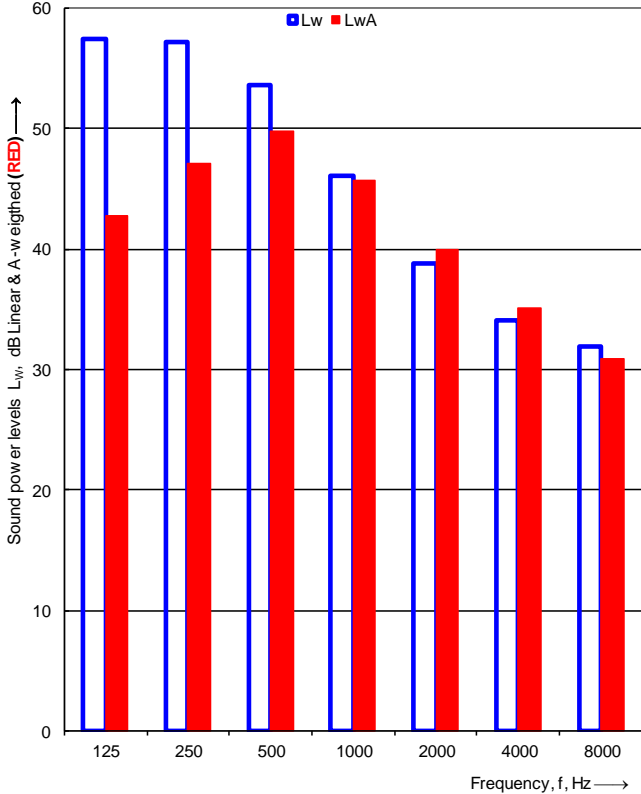
 		Sound power levels according to ISO 3743-1:2010	 TEKNOLOGISK INSTITUT																																																																		
Engineering method for small, movable sources in reverberant fields - Comparison method for hard-walled test rooms																																																																					
Client:	Panasonic Marketing Europe GmbH		Date of test: 09-05-2017																																																																		
Object:	Split air to water heatpump Model: WH-UQ12HE8(Outdoor unit) + WH-SQC12H9E8(Indoor unit)																																																																				
Mounting conditions:	The outdoor unit is standing free on four 5.5 cm thick heavy concrete tiles placed on a vibration damping mat, which is placed on a water drop tray. The water drop tray is located on a 2.5 cm thick wooden board laying on the floor. The outdoor unit is mounted on 6 supporting metal support frame using 6 vibration insulators.																																																																				
<hr/>																																																																					
Operating conditions:	A7/W55, Compressor speed: 52-53[Hz], Heating capacity: 11.7[kW], COP: 3.0, Water flow rate: 1250[l/h], Fan speed 1:530[rpm], Fan speed 2: 570[rpm]																																																																				
Static pressure:	1013 kPa	<u>Reference box:</u>																																																																			
Air temperature:	7.0 °C	L1: 1.3 m																																																																			
Relative air humidity:	84.0 %	L2: 0.3 m																																																																			
Test room volume:	102.8 m³	L3: 1.3 m																																																																			
Area, S, of test room:	138.9 m²	Volume: 0.5 m³																																																																			
<hr/>																																																																					
<table border="1"><thead><tr><th>Frequency f [Hz]</th><th>L_w 1/3 octave [dB]</th><th>1/1 oct [dB]</th></tr></thead><tbody><tr><td>100</td><td>64.9</td><td></td></tr><tr><td>125</td><td>58.1</td><td>66.1</td></tr><tr><td>160</td><td>55.7</td><td></td></tr><tr><td>200</td><td>65.6</td><td></td></tr><tr><td>250</td><td>55.8</td><td>66.2</td></tr><tr><td>315</td><td>53.0</td><td></td></tr><tr><td>400</td><td>53.2</td><td></td></tr><tr><td>500</td><td>52.4</td><td>57.5</td></tr><tr><td>630</td><td>52.4</td><td></td></tr><tr><td>800</td><td>51.8</td><td></td></tr><tr><td>1000</td><td>48.2</td><td>54.3</td></tr><tr><td>1250</td><td>47.2</td><td></td></tr><tr><td>1600</td><td>45.6</td><td></td></tr><tr><td>2000</td><td>43.9</td><td>48.8</td></tr><tr><td>2500</td><td>42.0</td><td></td></tr><tr><td>3150</td><td>40.4</td><td></td></tr><tr><td>4000</td><td>38.5</td><td>43.4</td></tr><tr><td>5000</td><td>35.9</td><td></td></tr><tr><td>6300</td><td>33.9</td><td></td></tr><tr><td>8000</td><td>32.2</td><td>36.7</td></tr><tr><td>10000</td><td>27.8</td><td></td></tr></tbody></table>	Frequency f [Hz]	L _w 1/3 octave [dB]	1/1 oct [dB]	100	64.9		125	58.1	66.1	160	55.7		200	65.6		250	55.8	66.2	315	53.0		400	53.2		500	52.4	57.5	630	52.4		800	51.8		1000	48.2	54.3	1250	47.2		1600	45.6		2000	43.9	48.8	2500	42.0		3150	40.4		4000	38.5	43.4	5000	35.9		6300	33.9		8000	32.2	36.7	10000	27.8				
Frequency f [Hz]	L _w 1/3 octave [dB]	1/1 oct [dB]																																																																			
100	64.9																																																																				
125	58.1	66.1																																																																			
160	55.7																																																																				
200	65.6																																																																				
250	55.8	66.2																																																																			
315	53.0																																																																				
400	53.2																																																																				
500	52.4	57.5																																																																			
630	52.4																																																																				
800	51.8																																																																				
1000	48.2	54.3																																																																			
1250	47.2																																																																				
1600	45.6																																																																				
2000	43.9	48.8																																																																			
2500	42.0																																																																				
3150	40.4																																																																				
4000	38.5	43.4																																																																			
5000	35.9																																																																				
6300	33.9																																																																				
8000	32.2	36.7																																																																			
10000	27.8																																																																				
<hr/>																																																																					
Sound power level L _w (A):		61 dB [re 1pW]																																																																			
<hr/>																																																																					
Name of test institute:	DTI																																																																				
No. of test report:	300-KLAB-16-021																																																																				
<hr/>																																																																					
Date:	09-05-2017																																																																				



DANISH
TECHNOLOGICAL
INSTITUTE

Page 11 of 13
300-KLAB-16-022

Detailed test results - sound power level - test 5




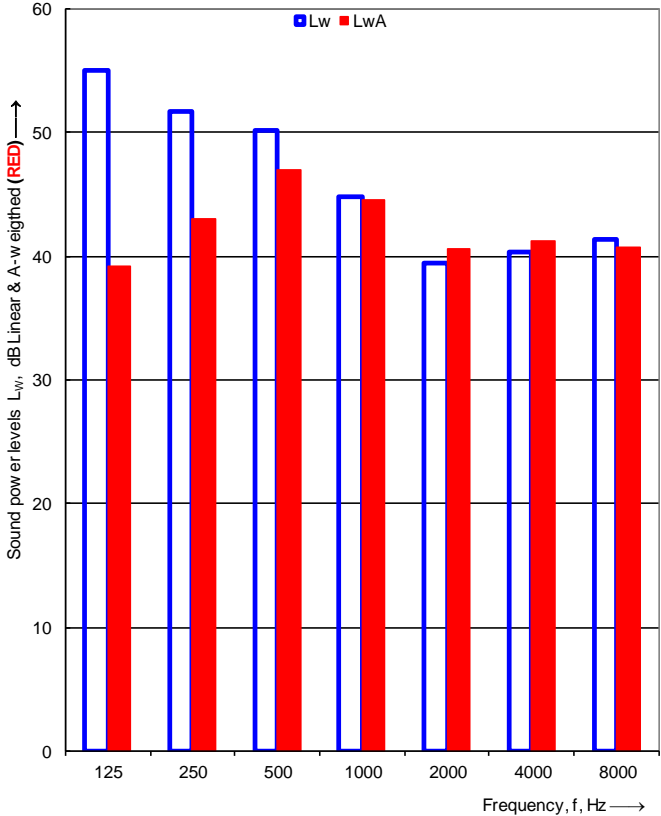
 		Sound power levels according to ISO 3743-1:2010	 TEKNOLOGISK INSTITUT																																																																		
Engineering method for small, movable sources in reverberant fields - Comparison method for hard-walled test rooms																																																																					
Client:	Panasonic Marketing Europe GmbH		Date of test: 09-05-2017																																																																		
Object:	Split air to water heatpump Model: WH-UQ12HE8(Outdoor unit) + WH-SQC12H9E8(Indoor unit)																																																																				
Mounting conditions:	The outdoor unit is standing free on four 5.5 cm thick heavy concrete tiles placed on a vibration damping mat, which is placed on a water drop tray. The water drop tray is located on a 2.5 cm thick wooden board laying on the floor. The outdoor unit is mounted on 6 supporting metal support frame using 6 vibration insulators.																																																																				
Operating conditions:	A7/W55, Compressor speed: 36-37[Hz], Heating capacity: 7.9[kW], COP: 3.0, Water flow rate: 850[l/h], Fan speed 1:380[rpm], Fan speed 2: 420[rpm], Quiet mode 3																																																																				
Static pressure:	1013 kPa	<u>Reference box:</u>																																																																			
Air temperature:	7.0 °C	L1:	1.3 m																																																																		
Relative air humidity:	84.0 %	L2:	0.3 m																																																																		
Test room volume:	102.8 m³	L3:	1.3 m																																																																		
Area, S, of test room:	138.9 m²	Volume:	0.5 m³																																																																		
<table border="1"><thead><tr><th>Frequency f [Hz]</th><th>L_w 1/3 octave [dB]</th><th>1/1 oct [dB]</th></tr></thead><tbody><tr><td>100</td><td>51.5</td><td></td></tr><tr><td>125</td><td>49.0</td><td>57.4</td></tr><tr><td>160</td><td>55.2</td><td></td></tr><tr><td>200</td><td>56.2</td><td></td></tr><tr><td>250</td><td>47.4</td><td>57.1</td></tr><tr><td>315</td><td>46.6</td><td></td></tr><tr><td>400</td><td>51.6</td><td></td></tr><tr><td>500</td><td>46.6</td><td>53.6</td></tr><tr><td>630</td><td>45.9</td><td></td></tr><tr><td>800</td><td>43.7</td><td></td></tr><tr><td>1000</td><td>40.0</td><td>46.0</td></tr><tr><td>1250</td><td>38.3</td><td></td></tr><tr><td>1600</td><td>35.5</td><td></td></tr><tr><td>2000</td><td>34.0</td><td>38.8</td></tr><tr><td>2500</td><td>31.9</td><td></td></tr><tr><td>3150</td><td>30.7</td><td></td></tr><tr><td>4000</td><td>28.9</td><td>34.1</td></tr><tr><td>5000</td><td>27.8</td><td></td></tr><tr><td>6300</td><td>26.8</td><td></td></tr><tr><td>8000</td><td>29.2</td><td>31.8</td></tr><tr><td>10000</td><td>23.4</td><td></td></tr></tbody></table>		Frequency f [Hz]	L _w 1/3 octave [dB]	1/1 oct [dB]	100	51.5		125	49.0	57.4	160	55.2		200	56.2		250	47.4	57.1	315	46.6		400	51.6		500	46.6	53.6	630	45.9		800	43.7		1000	40.0	46.0	1250	38.3		1600	35.5		2000	34.0	38.8	2500	31.9		3150	30.7		4000	28.9	34.1	5000	27.8		6300	26.8		8000	29.2	31.8	10000	23.4			
Frequency f [Hz]	L _w 1/3 octave [dB]	1/1 oct [dB]																																																																			
100	51.5																																																																				
125	49.0	57.4																																																																			
160	55.2																																																																				
200	56.2																																																																				
250	47.4	57.1																																																																			
315	46.6																																																																				
400	51.6																																																																				
500	46.6	53.6																																																																			
630	45.9																																																																				
800	43.7																																																																				
1000	40.0	46.0																																																																			
1250	38.3																																																																				
1600	35.5																																																																				
2000	34.0	38.8																																																																			
2500	31.9																																																																				
3150	30.7																																																																				
4000	28.9	34.1																																																																			
5000	27.8																																																																				
6300	26.8																																																																				
8000	29.2	31.8																																																																			
10000	23.4																																																																				
Sound power level L _w (A):		54 dB [re 1pW]																																																																			
Name of test institute:	DTI																																																																				
No. of test report:	300-KLAB-16-021																																																																				
Date:	09-05-2017																																																																				



DANISH
TECHNOLOGICAL
INSTITUTE

Page 12 of 13
300-KLAB-16-022

Detailed test results - sound power level - test 6

 		Sound power levels according to ISO 3743-1:2010		 TEKNOLOGISK INSTITUT																																																																			
Engineering method for small, movable sources in reverberant fields - Comparison method for hard-walled test rooms																																																																							
Client:		Panasonic Marketing Europe GmbH		Date of test: 09-05-2017																																																																			
Object:		Split air to water heatpump Model: WH-UQ12HE8(Outdoor unit) + WH-SQC12H9E8(Indoor unit)																																																																					
Mounting conditions:		The outdoor unit is standing free on four 5.5 cm thick heavy concrete tiles placed on a vibration damping mat, which is placed on a water drop tray. The water drop tray is located on a 2.5 cm thick wooden board laying on the floor. The outdoor unit is mounted on 6 supporting metal support frame using 6 vibration insulators.																																																																					
Operating conditions:		A7/W55, Compressor speed: 20[Hz], Heating capacity: 2.05[kW], COP: 1.4, Water flow rate: 700[l/h], Fan speed 1:360[rpm], Fan speed 2: 400[rpm], Test mode 4																																																																					
Static pressure:		1013 kPa		<u>Reference box:</u>																																																																			
Air temperature:		7.0 °C		L1: 1.3 m																																																																			
Relative air humidity:		84.0 %		L2: 0.3 m																																																																			
Test room volume:		102.8 m³		L3: 1.3 m																																																																			
Area, S, of test room:		138.9 m²		Volume: 0.5 m³																																																																			
<table border="1"><thead><tr><th>Frequency f [Hz]</th><th>L_w 1/3 octave [dB]</th><th>1/1 oct [dB]</th></tr></thead><tbody><tr><td>100</td><td>50.4</td><td></td></tr><tr><td>125</td><td>50.6</td><td>55.0</td></tr><tr><td>160</td><td>49.6</td><td></td></tr><tr><td>200</td><td>48.3</td><td></td></tr><tr><td>250</td><td>45.9</td><td>51.7</td></tr><tr><td>315</td><td>46.1</td><td></td></tr><tr><td>400</td><td>45.2</td><td></td></tr><tr><td>500</td><td>46.2</td><td>50.1</td></tr><tr><td>630</td><td>44.5</td><td></td></tr><tr><td>800</td><td>42.0</td><td></td></tr><tr><td>1000</td><td>38.7</td><td>44.7</td></tr><tr><td>1250</td><td>38.1</td><td></td></tr><tr><td>1600</td><td>35.8</td><td></td></tr><tr><td>2000</td><td>34.6</td><td>39.5</td></tr><tr><td>2500</td><td>33.4</td><td></td></tr><tr><td>3150</td><td>34.6</td><td></td></tr><tr><td>4000</td><td>35.3</td><td>40.4</td></tr><tr><td>5000</td><td>36.6</td><td></td></tr><tr><td>6300</td><td>38.5</td><td></td></tr><tr><td>8000</td><td>37.1</td><td>41.4</td></tr><tr><td>10000</td><td>31.7</td><td></td></tr></tbody></table>		Frequency f [Hz]	L _w 1/3 octave [dB]	1/1 oct [dB]	100	50.4		125	50.6	55.0	160	49.6		200	48.3		250	45.9	51.7	315	46.1		400	45.2		500	46.2	50.1	630	44.5		800	42.0		1000	38.7	44.7	1250	38.1		1600	35.8		2000	34.6	39.5	2500	33.4		3150	34.6		4000	35.3	40.4	5000	36.6		6300	38.5		8000	37.1	41.4	10000	31.7					
Frequency f [Hz]	L _w 1/3 octave [dB]	1/1 oct [dB]																																																																					
100	50.4																																																																						
125	50.6	55.0																																																																					
160	49.6																																																																						
200	48.3																																																																						
250	45.9	51.7																																																																					
315	46.1																																																																						
400	45.2																																																																						
500	46.2	50.1																																																																					
630	44.5																																																																						
800	42.0																																																																						
1000	38.7	44.7																																																																					
1250	38.1																																																																						
1600	35.8																																																																						
2000	34.6	39.5																																																																					
2500	33.4																																																																						
3150	34.6																																																																						
4000	35.3	40.4																																																																					
5000	36.6																																																																						
6300	38.5																																																																						
8000	37.1	41.4																																																																					
10000	31.7																																																																						
		Sound power level L_w(A): 52 dB [re 1pW]																																																																					
Name of test institute:		DTI																																																																					
No. of test report:		300-KLAB-16-021																																																																					
Date:		09-05-2017																																																																					



Appendix 1: Test Procedure

The measurements of the emitted sound power level from the heat pump are carried out according to the following:

- DS/EN 14511:2013
- EN 12102
- DS/EN 3743/1

The basic acoustic measurement standard DS/EN 3743-1 is a comparison method using a calibrated reference sound source. Two series of sound pressure measurements are made under exactly the same acoustic conditions, e.g. the same microphone positions, temperature and air humidity. The calibrated sound power levels are known for the reference sound source at each frequency band, and they are used in the estimation of the acoustical correction factor for the calculation of the sound power emitted from the tested heat pump. The background noise levels are measured and used for relevant corrections.

The final total A-weighted sound power level is based on measurements and calculations in 1/3-octave levels, which then are summed into 1/1-octave levels. The uncertainty is estimated on the weighted standard deviations in 1/1-octave levels.

The actual microphone positions and correction values are saved in data files linked to the complete project documentation according to the DANAK-accreditation.

The complete measurement system is documented and regularly calibrated according to DANAK.

The detailed description of the measurement method is given in Danish in the quality database system "QA Web" at Danish Technological Institute, which is accessible by DANAK.